




Watertight enclosure for emergency systems, equipped with illuminated push-button and 2 contacts 1NO+1NC that can be expanded up to 4 contacts. The enclosure has the pre-arrangement for use of green led to indicate the good condition of emergency circuit. It is pre-arranged with a short or long push-button for deliberate operation, or with an intrinsic safety function. Thanks to the emergency hammer, available as an accessory, sealable mask and halogen free materials are ideally suited for applications in areas open to public.

Prąd znamionowy (A)	125	Klasa Izolacji	II
Kolor	Czerwony RAL 3000	Śred. zewn. LxHxD (mm)	120x120x50
Ochrona IP	IP55	Montaż	Montaż naścienny
Materiał	Technopolimerowy	Odporność na wstrząsy	IK08
Prąd cewki (V)	400	Akcesoria w zestawie	Przycisk + 2 styki
Próba rozżarzonym drutem	650 °C	Temperatura robocza	-25 +60 °C
Rodzaj materiału	Bezhalogenowe zgodnie z normą EN 50267-2-2	Electrocod	0321
Liczba styków możliwych do zamontowania	4	Twardość kulkowa	70 °C
Norma	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	Izolacja wyjściowe	750 V



DIMENSIONAL

TECHNICAL SYMBOLOGY

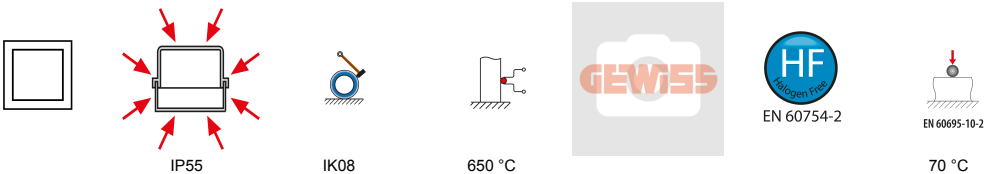

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 13/04/2018

Data, measures, designs and pictures are shown
only as informativ purposes,
and could be changed without previous notice