




Watertight enclosure RAL 3000 for emergency systems fitted with hole Ø22, compatible with momentary push-buttons, selectors and indicators of the 74 PS series. Thanks to the emergency hammer, available as an accessory, sealable mask and halogen free materials are ideally suited for applications in areas open to public.

Prąd znamionowy (A)	125	Klasa Izolacji	II
Kolor	Czerwony RAL 3000	Śred. zewn. LxHxD (mm)	108x180x100
Ochrona IP	IP55	Montaż	Montaż naścienny
Materiał	Technopolimerowy	Odporność na wstrząsy	IK08
Prąd cewki (V)	400	Próba rozżarzonym drutem	650 °C
Temperatura robocza	-25 +60 °C	Rodzaj materiału	Bezhalogenowe zgodnie z normą EN 50267-2-2
Electrocod	0321	Twardość kulkowa	70 °C
Norma	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	Izolacja wyjściowe	750 V
Liczba modułów EN 50022	4		



DIMENSIONAL

TECHNICAL SYMBOLOGY

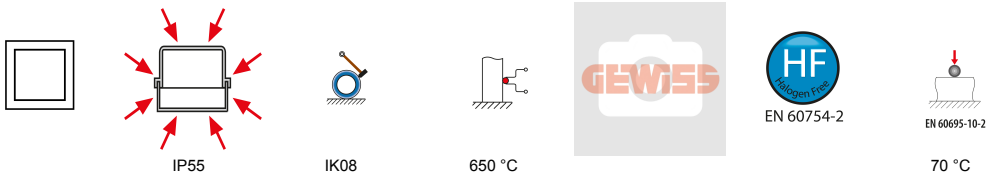

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 13/04/2018

Data, measures, designs and pictures are shown
only as informativ purposes,
and could be changed without previous notice